

AC 126

Scotsman
Ice Systems

Self Contained Ice Machine up to 74 kg

Item #:

Project:

Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Routine Maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door.



AC L 126
Large Gourmet 39 g
Ø 38 x H 41 mm



AC M 126
Medium Gourmet 20 g
Ø 30 x H 34 mm



AC S 126
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

34 kg

REFRIGERANT GAS

R134a
R404A

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine up to 86 kg

16 October 2017


AC 126

Self Contained Ice Machine up to 74 kg

Item #:

Project:

Quantity:

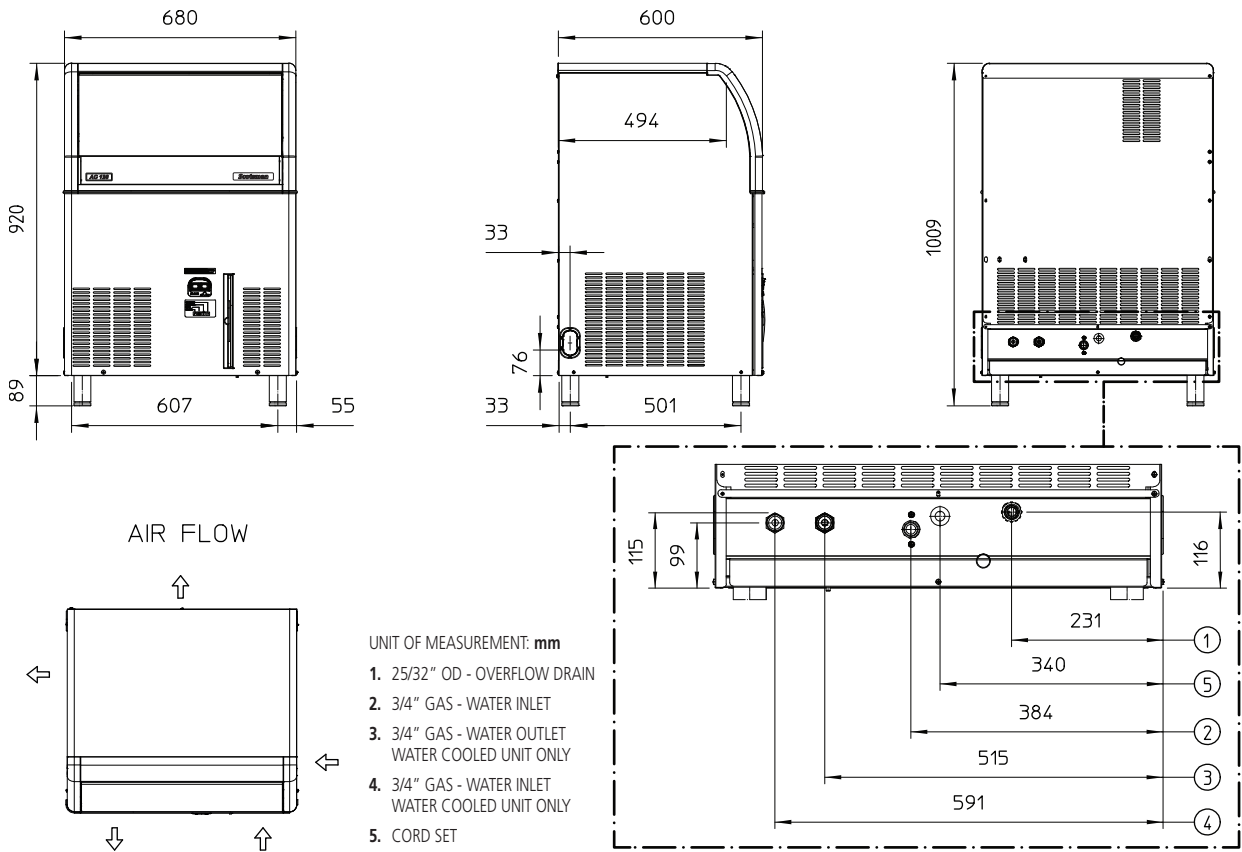

UNIT DATA Size (W x D x H) 680 x 600 x 1010 mm Net weight 65 kg SHIPPING DATA Carton (W x D x H) 750 x 670 x 1100 mm Weight 75 kg					Compressor		Circuit wires		Max. fuse size
			Version	Voltage	Btu/h	W	No.	Ømm²	A
			AC L 126 AS	230/50/1	4913	1440	3	1.5	10
			AC L 126 WS	230/50/1	4913	1440	3	1.5	10
			AC M 126 AS	230/50/1	4948	1450	3	1.5	10
			AC M 126 WS	230/50/1	4948	1450	3	1.5	10
			AC S 126 AS	230/50/1	4948	1450	3	1.5	10
AC S 126 WS	230/50/1	4948	1450	3	1.5	10			
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
AC L 126 AS	Air	230/50/1	63	61	49	28.6	14.0	5.8	770
AC L 126 WS	Water	230/50/1	70	66	58	24.1	13.0	68.8	600
AC M 126 AS	Air	230/50/1	70	66	55	24.6	13.8	5.7	740
AC M 126 WS	Water	230/50/1	74	71	60	20.5	12.3	70.8	580
AC S 126 AS	Air	230/50/1	55	53	41	24.6	13.8	5.7	650
AC S 126 WS	Water	230/50/1	64	61	53	20.5	12.3	70.8	600

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions