














## Dati Tecnici - Specifications

											
	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	kg	Lbs	kg	Lbs	Ton CO2 equiv.
M192 A		2348	1100	16	14.7	11	68	150	80	176	3,14
M192 W		2348	1000	16	11.1	126	68	150	80	176	2,35

## 24h Produzione Ghiaccio - Ice Production


### Raffreddamento ad aria - Air Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>198</b>	<b>218</b>	<b>222</b>	<b>225</b>
50°	437	481	490	496
21°	<b>177</b>	<b>197</b>	<b>201</b>	<b>204</b>
70°	390	434	443	450
32°	<b>140</b>	<b>160</b>	<b>164</b>	<b>167</b>
90°	309	353	362	368
38°	<b>122</b>	<b>142</b>	<b>146</b>	<b>149</b>
100°	269	313	322	329


### Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>173</b>	<b>193</b>	<b>202</b>	<b>205</b>
50°	381	425	446	453
21°	<b>161</b>	<b>183</b>	<b>194</b>	<b>197</b>
70°	356	404	427	435
32°	<b>158</b>	<b>176</b>	<b>184</b>	<b>190</b>
90°	348	388	406	419
38°	<b>145</b>	<b>165</b>	<b>175</b>	<b>183</b>
100°	321	365	386	404


Vista frontale  
Front view




Vista laterale  
Lateral view





Vista superiore  
Top view



AIR COOLED 





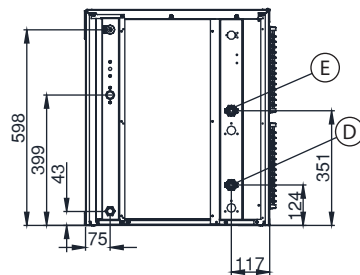



WATER COOLED 



- A** Water drain Ø20 mm
- B** Potable water inlet 3/4 GAS
- C** Electrical cable supply
- D** Water cooled inlet 3/4 GAS
- E** Water cooled outlet 3/4 GAS



### PANNELLO DI CONTROLLO - CONTROL PANEL

	Alimentazione Powered
	In Funzionamento Operating
	Deposito Pieno/Lavaggio Storage Full / Washing
	Allarme Alarm
	Allarme Alta Pressione High Pressure Alarm
	Pulsante Reset/Lavaggio Button Reset/Washing


### DIMENSIONI - DIMENSIONS

LxPxH(mm): 560 x 620 x 660  
WxDxH(in): 22" x 24 7/16" x 26"

### DEPOSITO - SLOPE BIN

D105-D155-D205-D255(KM205-255)


### TIPO GHIACCIO - ICE TYPE



**HALF-LARGE**  
10 x 29 x 24 - 6 gr

**325**


PZ. / CICLO PCS / CYCLE



**DICE**  
22 x 22 x 24 - 10 gr

**204**

PZ. / CICLO PCS / CYCLE



**LARGE**  
29 x 29 x 24 - 17 gr

**130**

PZ. / CICLO PCS / CYCLE

### CONDIZIONI USO-OPERATING REQUIREMENTS



220-240V / 1 / 50HZ R404A GWP=3922

MIN	MAX
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
- 10 %	+ 10 %
1 BAR (14 PSI)	5 BAR (70 PSI)

Calore espulso - Rejected Heat **2432 W**  
Volume aria - Air Volume **590 m<sup>3</sup>/h**