



ESPOSTORI e BANCHI
SHOWCASES and COUNTERS



LINEA LUSO
LUXURY-LINE



BUFFET Gastronomia
Gastronomy BUFFET



VEVTRINE: vini, bevande, gelati
DISPLAY: wines, drinks, ice cream



ARMADI refrigerati semi-professionali
Semi-professional refrigerated CABINETS



RISTORAZIONE
CATERING Equipment



MINIMARKET
Minimarket



PRISMA 400

NEW TBV-PG version

PRISMA 400 TNV-PG



Centralina elettronica
Electronic control panel




Neon di serie
Standard neon

| Colori standard Standard colors | | Colori optional Optional colors |
|------------------------------------|---------|------------------------------------|
| | | |
| COD. 02 | COD. 33 | RAL |




PRISMA 400

TNV/PF ♦ TNV/PG ♦ TNV/PQ ♦ TPV/PF PRAL
TPV/PG PRAL ♦ TPV/PQ PRAL ♦ TBV/PF ♦ TBV/PG

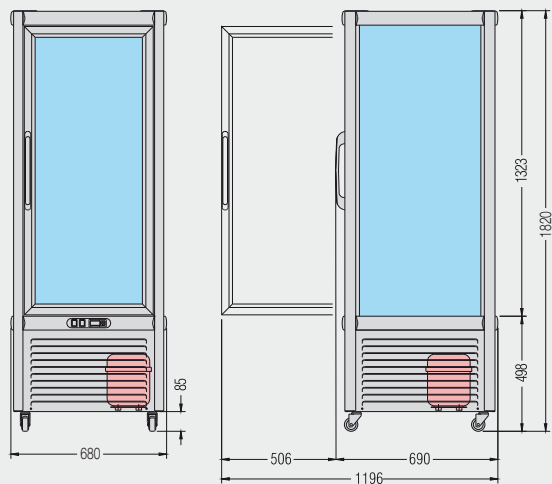

PRISMA 400

TBS-PF

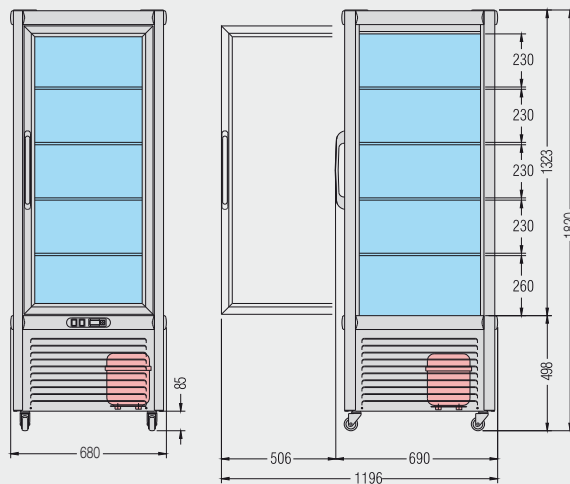

TNV/PF TPV/PF Pral

*Climatizzata!
Humidity control unit!*



Griglie a filo
Wire shelves

TBV/PF



Griglie a filo inox
Wire steel shelves

TNV/PG TPV/PG Pral TBV/PG

*Climatizzata!
Humidity control unit!*




Ripiani rotanti in vetro
Rotating glass shelves

TBS/PF



TNV/PQ TPV/PQ Pral

*Climatizzata!
Humidity control unit!*



Ripiani in cristallo
Crystal plates

Evaporatore statico a
griglie fisse
Static evaporator with
fixed shelves.

| | | °C | mm. (LxPxH) | Lt. | DI SERIE | Watt | % U.R. | H ₂ O | | | Kg. | | |
|------------------------------|--|---------|--------------|-----|--------------------------------------|------|--------|------------------|-------------|-------|-----|----------|---------------|
| Prisma 400 TNV-PF | | +4/+10 | 680x690x1820 | 400 | n° 5 mm. 435x505 | 580 | 75 | AUT | 230v/1/50Hz | R404a | 160 | Optional | Neon di serie |
| Prisma 400 TPV-PF Pral | | +14/+16 | 680x690x1820 | 400 | n° 5 mm. 435x505 | 450 | 40/44 | AUT | 230v/1/50Hz | R404a | 160 | Optional | Neon di serie |
| Prisma 400 TNV-PG | | +4/+10 | 680x690x1820 | 400 | n° 5 Ø mm. 465 | 590 | 75 | AUT | 230v/1/50Hz | R404a | 168 | Optional | Neon di serie |
| Prisma 400 TPV-PG Pral | | +14/+16 | 680x690x1820 | 400 | n° 5 Ø mm. 465 | 450 | 40/44 | AUT | 230v/1/50Hz | R404a | 168 | Optional | Neon di serie |
| Prisma 400 TNV-PQ | | +4/+10 | 680x690x1820 | 400 | n° 5 mm. 500x430 | 600 | 75 | AUT | 230v/1/50Hz | R404a | 170 | Optional | Neon di serie |
| Prisma 400 TPV-PQ Pral | | +14/+16 | 680x690x1820 | 400 | n° 5 mm. 500x430 | 1040 | 40/44 | AUT | 230v/1/50Hz | R404a | 170 | Optional | Neon di serie |
| Prisma 400 TBS-PF | | -5/-17 | 680x690x1820 | 400 | n° 3 mm. 503x460 n° 2 mm. 435x505 | 600 | 40 | MAN | 230v/1/50Hz | R404a | 178 | Optional | Neon di serie |
| Prisma 400 TBV-PF | | -10/-17 | 680x690x1820 | 400 | n° 5 mm. 435x505 | 620 | 40 | AUT | 230v/1/50Hz | R404a | 180 | Optional | Neon di serie |
| NEW Prisma 400 TBV-PG | | -10/-17 | 680x690x1820 | 400 | n° 5 Ø mm. 465 | 620 | 40 | AUT | 230v/1/50Hz | R404a | 180 | Optional | Neon di serie |

Dati di collaudo • Test details • Détails d'essai • Prüfungsergebnisse • Datos de ensayo • MAX = (25°C - % U.R. 60)